


DS-7204HVI-ST Standalone DVR



Key Features

- Each channel supports up to 4CIF recording and CIF real time recording
- Dual stream
- Simultaneous VGA and CVBS output
- 1 SATA Interface
- 4-ch synchronous playback

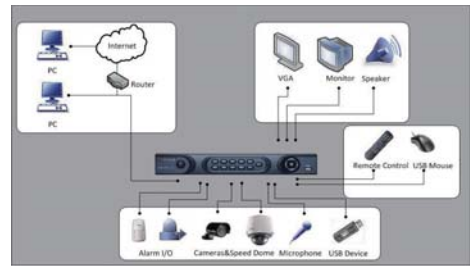

Specifications

| | | DS-7204HVI-ST |
|---------------------|-----------------------|--|
| Video/Audio input | Video compression | H.264 |
| | Video input | 4-ch |
| | Video input interface | BNC (1.0Vp-p, 75Ω), PAL/NTSC adaptive |
| | Audio compression | G.711 |
| | Audio input | 4-ch |
| | Audio input interface | RCA (2Vp-p, 1kΩ) |
| | Voice talk input | 1-ch RCA (2Vp-p, 1kΩ), independent |
| Video/Audio output | Preview resolution | PAL: 704x576; NTSC: 704x480 |
| | VGA output | 1, resolution: 1024x768/60Hz |
| | Recording resolution | 4CIF/CIF/QCIF |
| | Synchronous Playback | 4-ch |
| | Video output | 2-ch, BNC(1.0Vp-p, 75Ω) |
| | Video loop output | N/A |
| | Frame rate | 4CIF: 12fps; CIF/QCIF: 25fps(P)/30fps(N); |
| Hard disk driver | Video bit rate | 32Kbps~2048Kbps, or user-defined (Max.3072Kbps) |
| | Audio output | 1-ch, RCA connector (Linear, 1kΩ) |
| | Interface type | 1 SATA Interface, each interface supports up to 2TB capacity |
| External interface | Capacity | Up to 2TB |
| | Network Interface | 1 RJ45 10M/100M adaptive Ethernet Interface |
| | Serial Interfaces | 1 RS-232 interface; 1 RS-485 interface |
| | USB interface | 2, USB2.0 |
| | Alarm input | 4-ch |
| | Alarm output | 1-ch |
| General | Power supply | 12V DC |
| | Consumption | 10W (without HDD or DVD-R/W) |
| | Working temperature | -10°C~+55°C (14°F~131°F) |
| | Working humidity | 10%~90% |
| | Chassis | 19" standard 1U chassis |
| | Dimension | 315(W)×45(H)×230(D)mm (12.4"(W)×1.77"(H)×9.06"(D)) |
| Weight(without HDD) | ≤2500g (5.51lbs) | |