


DS-7208HVI-ST Standalone DVR



Key Features

- Each channel supports up to 4CIF recording and CIF real time recording
- Dual stream
- Simultaneous VGA and CVBS output
- 2 SATA Interfaces
- 8-ch synchronous playback

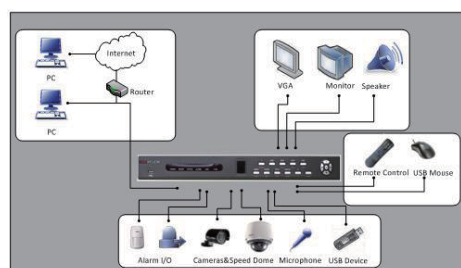

Specifications

		DS-7208HVI-ST
Video/Audio input	Video compression	H.264
	Video input	8-ch
	Video input interface	BNC (1.0Vp-p, 75Ω), PAL/NTSC adaptive
	Audio compression	G.711
	Audio input	4-ch
	Audio input interface	RCA (2Vp-p, 1kΩ)
	Voice talk input	1-ch RCA (2Vp-p, 1kΩ), independent
Video/Audio output	Preview resolution	PAL: 704x576; NTSC: 704x480
	VGA output	1, resolution: 1024x768/60Hz
	Recording resolution	4CIF/CIF/QCIF
	Synchronous Playback	8-ch
	Video output	2-ch, BNC(1.0Vp-p, 75Ω)
	Video loop output	optional
	Frame rate	4CIF: 8fps; CIF/QCIF: 25fps(P)/30fps(N);
	Video bit rate	32Kbps~2048Kbps, or user-defined (Max.3072Kbps)
Hard disk driver	Audio output	1-ch, RCA connector (Linear, 1kΩ)
	Interface type	2 SATA Interfaces, each interface supports up to 2TB capacity
External interface	Capacity	Up to 4TB
	Network Interface	1 RJ45 10M/100M adaptive Ethernet Interface
General	Serial Interfaces	1 RS-232 interface; 1 RS-485 interface
	USB interface	2, USB2.0
	Alarm input	8-ch
	Alarm output	4-ch
General	Power supply	12V DC
	Consumption	10W (without HDD or DVD-R/W)
	Working temperature	-10°C~+55°C (14°F~131°F)
	Working humidity	10%~90%
	Chassis	19" standard 1U chassis
	Dimension	445(W)×45(H)×290(D)mm (17.52"(W)×1.77"(H)×11.42"(D))
	Weight(without HDD)	≤4000g (8.82lbs)